


PAN50ISDN Panneau de brassage-ISDN voice- 50ports RJ45

Specifications :

CAT3 voice 25 ports and 50 ports patch panel.
Meet TIA/EIA-568-A and TIA/EIA-568-B Category 3 requirements.
Meet TIA/EIA TSB-40
Meet ISO/IEC Generic Cabling Standard 11801
Meet CENELEC Generic Cabling Standard EN50173
Angle: 90 Degree
Termination: 110 IDC Type

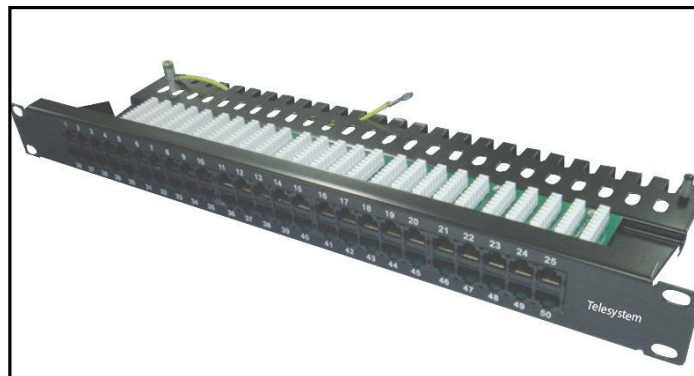

Electrical:

Current rating: 1.5 Amp Max.
Voltage rating: 150 Volts.
Contact resistance: 20 m-ohm.
Insulation Resistance: 500M-ohm.
Dielectric Withstand Voltage: 1000 V AC RMS, 60Hz 1min.

Materials:

Housing: PC UL94V-0.
IDC: PC UL94V-0, Accept 22-26 AWG Solid Wire.
PCB: FR4 1.6mm(0.04") thickness, 2 layers.
Contact: PC U194V-0, 0.45mm(0.018") Diameter Phosphor bronze with 3 u" to 50 u" Gold plating on contact area.