

## FOSC 144 DOM

## Dome Type Fiber Optic Splice Closure IP68 FTTH 288 Cores, Mechanical Sealing

### Description:

FOSC 144 DOM is an oval dome type fiber optic splice closure that support fiber splicing and protection. It is waterproof and dust proof and suitable for outdoor aerial hanged, pole mounted, wall mounted, duct or buried application.



### Features:

Impact resistant PP material, black color

Mechanical sealing structure, IP68

Max. 12pcs fiber optic splice tray, max. 288 fibers Can load

max. 18pcs SC simplex adapters




Two splitter space for PLC 1x8, 1x16

6 round cable port 18mm, 2 cable port 18mm support cable entry without cutting



Working temperature -35°C~70°C, cold and heat resistance, electrical insulation, corrosion resistance.

Support wall mounted, pole mounted, aerial hanged, direct buried.

### Dimension: (mm)

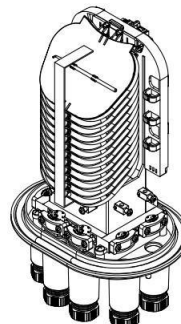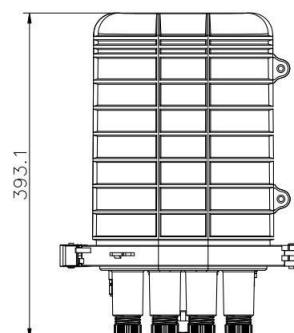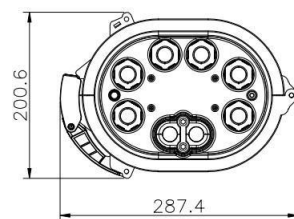

**Instruction:**

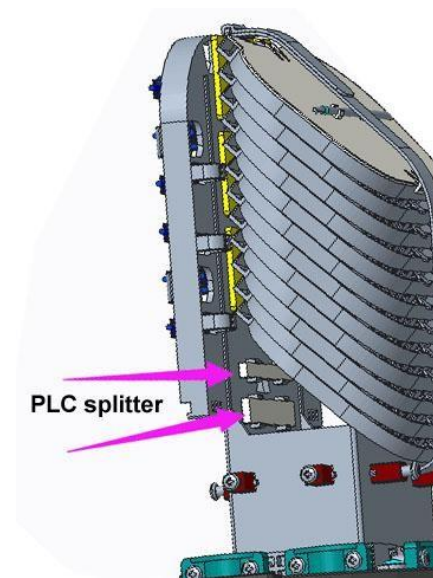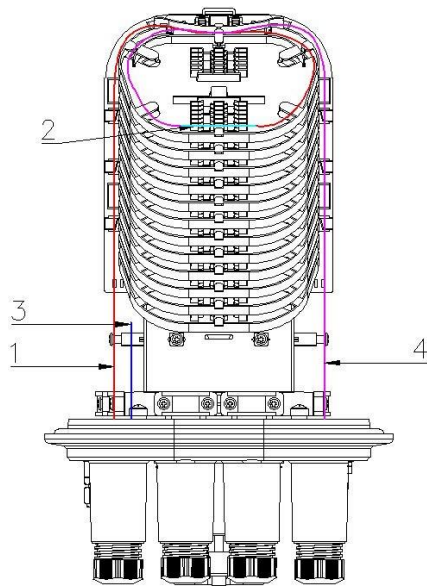

- 1. Input fiber optic cable
- 3. Cable strengthen member

- 2. Heat shrinkable protection sleeve
- 4. Output fiber optic cable

**Accessory list:**

Item	Name	Specification	Qty
1	Plastic tube	Outside $\Phi$ 4mm, thickness 0.6mm, plastic, white	1 meter
2	Cable tie	3mm*120mm, white	12 pcs
3	Inner hexagon spanner	S5 black	1 pc
4	Heat shrinkable protection sleeve	60*2.6*1.0mm	As per using capacity

**Packing information:**

4pcs per carton, each carton 61x44x45cm

