


2-fiber Self-Supporting Covered Wire Cable

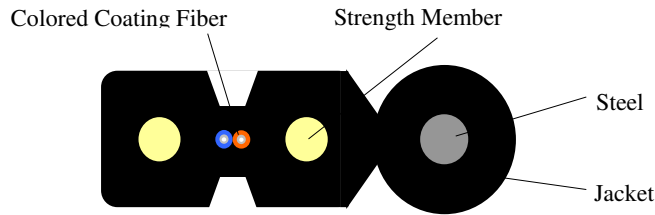

Fiber Parameters

No.	Items		Unit	Specification
				G.657A
1	Mode Field Diameter	1310nm	μm	9.0±0.4
		1550nm	μm	10.1±0.5
2	Cladding Diameter		μm	124.8±0.7
3	Cladding Non-Circularity		%	≤0.7
4	/Core-Cladding Concentricity Error		μm	≤0.5
5	Coating Diameter		μm	245±5
6	Coating Non-Circularity		%	≤6.0
7	Cladding-Coating Concentricity Error		μm	≤12.0
8	Cable Cutoff Wavelength		nm	$\lambda_{cc} \leq 1260$
9	Attenuation(max.)	1310nm	dB/km	≤0.35
		1550nm	dB/km	≤0.21

Cable Parameters

Items		Specifications
Fiber Count		2
Colored Coating Fiber	Dimension	250±15μm
	Color	Blue & Orange
Strength Member	Dimension	0.5mm
	Material	FRP
Self-Supporting Member	Dimension	1.2mm
	Material	Steel
Jacket	Dimension	5.2±0.2mm × 2.1±0.1mm
	Material	LSZH
	Color	Black

Mechanical and Environmental Characteristics

Distributeur SARL ALIEF lot n°: 1, Gpe 13, Hamiz, Dar El Beida, Alger std : ooredoo: 0560.271.399 , 0560.261.451 mobilis: 0661.528.551

Tel fix : +213 (0) 23 858 510 /11, (0)23 865001 Fax : +213 (0) 23 858 514 web: www.alief.dz emails: com@alief.dz, com@alief-dz.com Page 1

Items	Unite	Specifications
Tension (Long Term)	N	300
Tension (Short Term)	N	600
Crush (Long Term)	N/10cm	1000
Crush (Short Term)	N/10cm	2200
Min. Bend Radius (Dynamic)	mm	20D
Min. Bend Radius (Static)	mm	10D
Installation Temperature	□	-20~+60
Operating Temperature	□	-40~+70
Storage Temperature	□	-40~+70