

ShinewayTech® compact palmOTDR now offers even more testing capacities, flexibility and value with combination of 850/1300/1310 /1490/1550/1625/1650nm (Mono/double/triple wavelength) OTDR, 1310/1490/1550nm PON Power Meter, Stabilized Laser Source and VFL. The OTDR wavelengths cover the applications of regular end-to-end fiber characterization (1310/1550nm), premise/enterprise LAN testing (850/1300nm), FTTx fiber link construction verification (1490nm) and PON live fiber troubleshooting (1625/1650nm with filter). The integrated PON Power Meter can perform in-service testing of all PON signals (1310/1490/1550nm) on any spot of the network featuring pass-through design and burst mode support. palmOTDR is your ultimate solution to meet various testing requirements of entire fiber network.



Handheld OTDR


# palmOTDR Series

## Most Compact High-Performance OTDR


- ◆ Comprehensive fiber applications, ideal for LAN/WAN/FTTx certification & trouble-shooting:  
SM: 1310/1490/1550, 1625/1650nm (with filter), up to 50dB  
MM: 850/1300nm, 21/24dB
- ◆ Fault locating, fiber length/loss measurement, connector/splice/ splitter/ macro bend/fiber-end detection
- ◆ Built-in PON Power Meter for Triple-play live measurement
- ◆ Optional Stabilized Laser Source, SM/MM Power Meter and VFL
- ◆ FTTx in-service testing/ Testing through splitter:(1625/1650nm with filter)
- ◆ Splitter & fiber-end identifiable
- ◆ Auto/Manual(2-point/5-point)/Averaging/Real-time test
- ◆ Pass/Fail assessment and ORL test function
- ◆ Quick start: <5 seconds
- ◆ Perfect user interface, handheld & lightweight (1kg)
- ◆ Hotkeys: Easiest operation in the world, push-and-test
- ◆ 1000 test records storage
- ◆ Bellcore file format (.sor)
- ◆ PC software for batch data processing
- ◆ USB data interface, driver-free
- ◆ Multiple languages: EN/DE/IT/FR/ES/PT/RU/KR/VN/CN etc.
- ◆ 8 hrs continuous operation/20 hrs standby
- ◆ Dust-shock proof (2m drop test)
- ◆ CE, FCC, FDA certificates

## In-service Testing (Through Splitter)

- In-service testing (1625nm with filter)

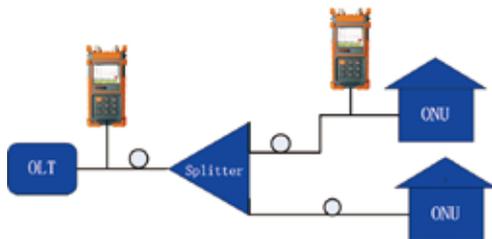


- Testing through splitter, splitter and fiber end identifiable

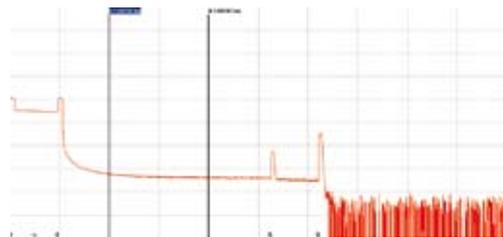

## Live Optical Signal Check

When OTDR tests with 1310/1490/1550nm wavelength, the live signals transmitting in the tested fiber may not only affect OTDR measurements but also damage the equipments connected to the network (SDH/WDM/PON) and OTDR receiver. palmOTDR series avoids the problem by starting in-service communication check before testing with message warning and auto termination functions to effectively protect test instruments and communications equipments.

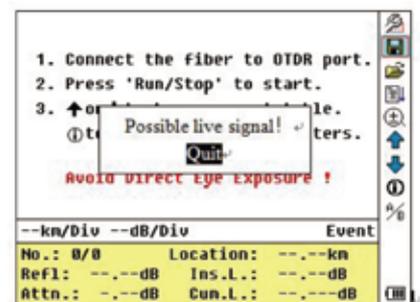

## Built-in PON Power Meter


The integration of PON Power Meter into such a small unit of palmOTDR makes FTTx certification and troubleshooting an exciting experience and efficient work. The PON Power Meter module can perform in-service testing of all PON signals (1310/1490/1550nm) on any spot of the network featuring pass-through design, burst mode and Pass/Warning/Fail assessment function, which can greatly help you evaluate PON signals transmission quality.



| Threshold            |       |        |        |
|----------------------|-------|--------|--------|
| Threshold Name:      |       |        |        |
| 1310nm 1490nm 1550nm |       |        |        |
| FAIL                 | 3.00  | -2.50  | 8.50   |
| PASS                 | -1.50 | -21.00 | -9.50  |
| WRNG                 | -2.50 | -24.00 | -12.50 |
| FAIL                 |       |        |        |


## Extended Stabilized Laser Source

Stabilized Laser Source shares palmOTDR optical port and work on the same working wavelength of palmOTDR.

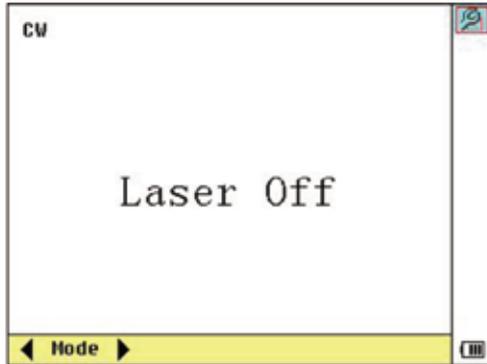


## Extended Optical Power Meter

- No warm-up
- Absolute power value and power loss measurement
- High accuracy, zero shift
- Power monitoring, high-low limit setting
- Reference setting

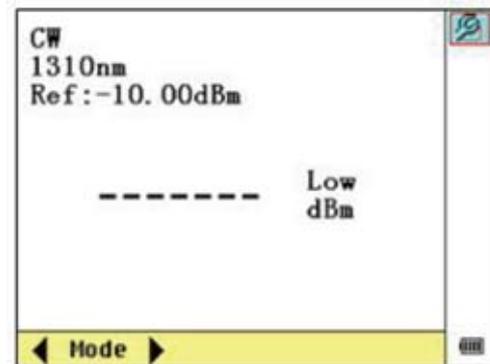

## Extended Optical Connector Inspector Module (MCI100 module)

- Focusing knob for fast focus
- Eye-safe and clear video viewing
- Interchangeable connector tips (male and female, PC and APC, 1.25mm and 2.5mm etc.)

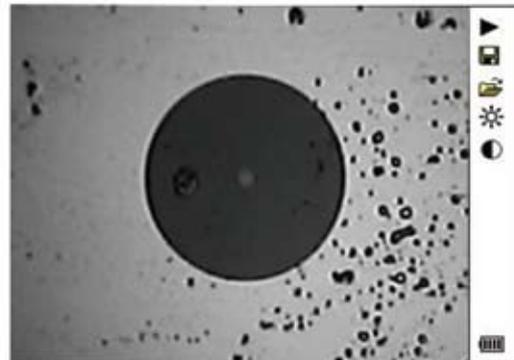


## Optimized Interface design

- Graphical User Interface
- Color and High Resolution




## OTDR LinkImage Software

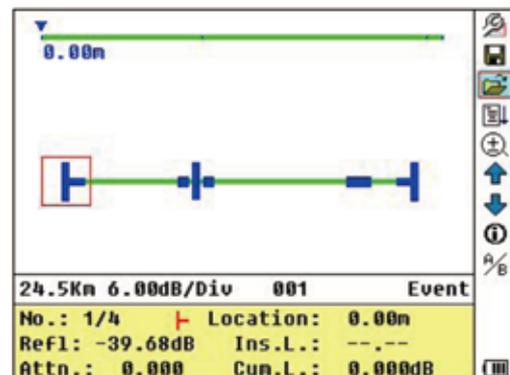

## OTDR Trace Manager Software

TraceManager software can display, analyze and edit trace files, generate and print comprehensive test and analysis reports in various forms.

- Trace viewing, events analysis
- Batch editing and flexible printing
- Trace viewing, events analysis
- Multi traces comparison
- Batch editing and flexible printing
- Bidirectional testing (Optional)
- CSV/ASCII report formats

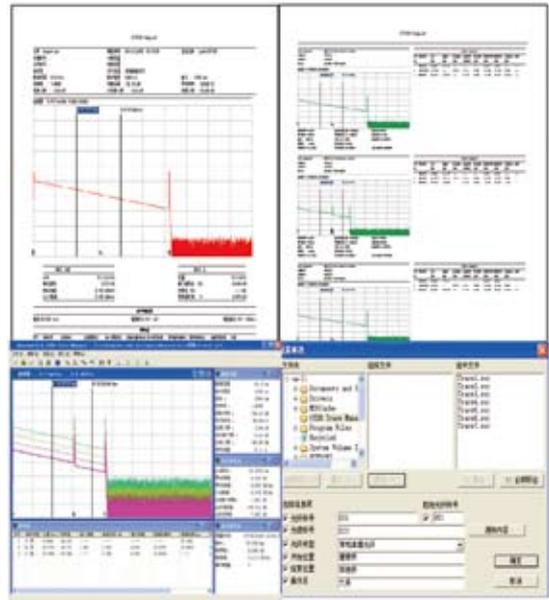

## Specifications

| Model <sup>(1)</sup>        |   | Wavelength<br>(±20nm)         | Dynamic<br>Range <sup>(2)</sup> | EDZ<br>(m) <sup>(3)</sup> | ADZ<br>(m) <sup>(3)</sup> |
|-----------------------------|---|-------------------------------|---------------------------------|---------------------------|---------------------------|
| Basic                       | Advanced  |                               |                                 |                           |                           |
| palmOTDR-M20AE              | palmOTDR-M20AE-VPSI   | 850/1300                      | 21/24dB                         | 1.5                       | 5                         |
| palmOTDR-S20AE              | palmOTDR-S20AE-VPSI   | 1310/1550                     | 32/30dB                         | 1.8                       | 5                         |
| palmOTDR-S20BE              | palmOTDR-S20BE-VPSI   | 1310/1550                     | 35/34dB                         | 1.5                       | 5                         |
| palmOTDR-S20C/N             | palmOTDR-S20C/N-VPSI  | 1310/1550                     | 40/38dB                         | 0.8                       | 4.5                       |
| palmOTDR-S20D/N             | palmOTDR-S20D/N-VPSI  | 1310/1550                     | 45/43dB                         | 0.8                       | 4.5                       |
| palmOTDR-S20F               | palmOTDR-S20F-VPSI  | 1310/1550                     | 50/48dB                         | 0.8                       | 4.5                       |
| palmOTDR-S20C/P             | palmOTDR-S20C/P-VPSI  | 1310/1490/1550                | 38/37/37dB                      | 0.8                       | 4.5                       |
| palmOTDR-S20C/X             | palmOTDR-S20C/X-VPSI  | 1310/1550/1625 <sup>(4)</sup> | 38/37/37dB                      | 0.8                       | 4.5                       |
| palmOTDR-P11C               | palmOTDR-P11C-SI  | 1625 <sup>(4)</sup>           | 37dB                            | 0.8                       | 4.5                       |
| palmOTDR-P31C               | palmOTDR-P31C-SI  | 1310/1550/1625 <sup>(4)</sup> | 38/37/37dB                      | 0.8                       | 4.5                       |
| palmOTDR-Q40A               | palmOTDR-Q40A-VPSI  | 850/1300/1310/1550            | 21/24/32/30dB                   | 1.5                       | 4.5                       |
| Selectable Range (Km)       | 0.1, 0.3, 0.5, 1.3, 2.5, 5, 10@850nm; 0.1,0.3,0.5,1.3,2.5,5,10,20,40,80@1300nm;<br>0.3, 1.3, 2.5, 5, 10, 20, 40, 80, 120, 160, 240@others       |                               |                                 |                           |                           |
| Pulse Width                 | 10ns, 30ns, 100ns, 300ns, 1µs@850nm; 10ns, 30ns, 100ns, 300ns, 1µs,<br>2.5µs@1300nm; 5ns, 10ns, 30ns,100ns, 300ns, 1µs,2.5µs, 10µs, 20µs@others |                               |                                 |                           |                           |
| Averaging Time              | Quick, 15s, 30s, 1min, 2min, 3min   |                               |                                 |                           |                           |
| Distance Measure Accuracy   | ±(1m+5×10 <sup>-5</sup> ×distance+sampling space)   |                               |                                 |                           |                           |
| Attenuation Detect Accuracy | ±0.05dB/dB  |                               |                                 |                           |                           |
| Reflection Detect Accuracy  | ±4dB  |                               |                                 |                           |                           |

|                       |   |
|-----------------------|---|
| Data Storage          | 1000 records  |
| Connectivity          | USB   |
| Connector             | FC/PC (Interchangeable SC, ST; optional LC)   |
| Power Supply          | NiMH Battery / AC Adapter   |
| Battery Life          | 8 hrs continuous operation, 20 hrs standby (on one charge); recharging time < 4 hrs |
| Operating Temperature | -20°C to 50°C   |
| Storage Temperature   | -40°C to 70°C   |
| Relative Humidity     | 0 to 95% (non-condensing)   |
| Weight                | 1kg (2.2 lbs)   |
| Dimensions (H×W×T)    | 220×110×70mm (8.7×4.3×2.7 inch)   |

## Functional Module Specifications

### Visible Fault Locator Module<sup>(5)</sup>

|                       |       |
|-----------------------|-------|
| Wavelength (±20nm)    | 650nm |
| Output Power (dBm)    | ≥-3   |
| Max Measurement Range | 5 Km  |

### Stabilized Laser Source Module<sup>(5)</sup>

|                    |  |
|--------------------|--|
| Wavelength (±20nm) | Same as OTDR working wavelength <sup>(5)</sup> |
| Output Power (dBm) | ≥-7  |

### Optical Power Meter Module<sup>(5)</sup>

|                            |                                   |
|----------------------------|-----------------------------------|
| Calibrated Wavelength (nm) | 850, 1300, 1310, 1490, 1550, 1625 |
| Power Range (dBm)          | -70 to +6 (-60 to +6 @ 850nm)     |
| Detector Type              | InGaAs                            |
| Display Resolution         | 0.01dB                            |
| Accuracy                   | ± 5% ± 0.01nW (±0.5dB@850nm)      |
| MOD Identification         | 1K, 2K Hz                         |

### PON Power Meter Module<sup>(6)</sup>

|                         |                                      |           |            |
|-------------------------|--------------------------------------|-----------|------------|
| Calibrated Wavelength   | 1310nm                               | 1490nm    | 1550nm     |
| Measurement Range (dBm) | -40 to +8<br>(Burst mode: -30 to +8) | -40 to +8 | -40 to +20 |
| Spectral Passband (nm)  | 1310±40                              | 1490±10   | 1550±10    |
| Power Uncertainty (dB)  | ≤ 0.5                                |           |            |
| Display Resolution (dB) | 0.01                                 |           |            |
| Insertion Loss (dB)     | ≤ 1.5                                |           |            |
| Threshold               | 60 user-definable threshold sets     |           |            |
| Data Storage            | 1200 records                         |           |            |

| MCI100 Optical Connector Inspector Module |  |
|---|--|
| Zoom                                      | 250X   |
| Resolution                                | 0.75µm   |
| Focus                                     | Manual   |
| Adpator                                   | Standard: 25-U-M: FC/SC/ST/E2000 UPC male;<br>125-U-M: LC/MU UPC male;<br>25-U-F: FC/SC/ST/E2000 UPC female;<br>LC-U-F: LC UPC female;<br>Optional: 125-A-M: LC/MU APC male;<br>25-A-M: FC/SC/ST/E2000 APC male;<br>SC-A-F: SC APC female;<br>FC-A-F: FC APC female;<br>LC-A-F: LC APC female; |
| Weight / Size                             | 150g/ 165×38×35mm  |

\* Specifications subject to change without notice

**Notes:**

- (1) Specifications describe the instrument’s warranted performance, measured with typical PC-type connectors. Uncertainties due to the refractive index of fiber are not considered.
- (2) The dynamic range is measured at maximum pulse width and averaging time of 3 minutes.
- (3) Conditions for dead zone measurement: Reflection event is at 0.6Km, reflection intensity is less than -45dB, event dead zone is measured with pulse width of 10ns; attenuation dead zone is measured with pulse width of 10ns.
- (4) 1625nm can be replaced by 1650nm.
- (5) Visible fault locator module, Stabilized laser source module and Optical power meter module is standard on -VPSI models. Stabilized laser source shares palmOTDR optical port and work on the same working wavelength of palmOTDR.
- (6) PON power meter module is standard on P11C and P31C.

## Order Information

**Standard Package Includes:**

Instrument, FC/PC connector, NiMH battery, TraceManager software CD, USB Data cable, AC adaptor, Soft carrying case, Warranty card, Certificate of calibration, Quick reference guide.

**Options:**

- palmOTDR-XXXX-VPSI: Visible Fault Locator module, Optical Power Meter module, Stabilized Laser Source module and Optical Connector Inspector Module for palmOTDR
- MCI100 Module: Optical Connector Inspector
- LM100 Function: LinkImage software

