



TS-IS1000+M : Digital Insulation Tester + Multimeter

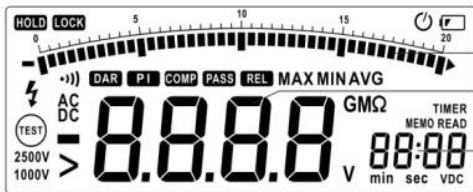

- ① Analog Bar
- ② Primary Screen
- ③ Secondary Screen

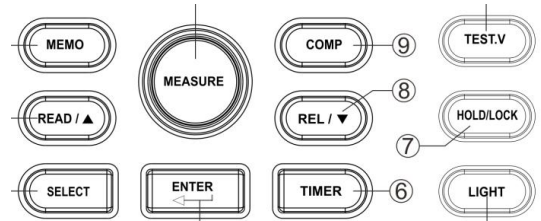

SPECIFICATIONS

	Source Output voltage	Measuring Range
	50V (0 % + 20 %)	0.01MΩ ~50 MΩ ± (3% +5)
	100V (0 % + 20 %)	0.01MΩ ~100 MΩ ± (3% +5)
	250V (0 % ~+ 20 %)	0.01MΩ ~250 ΩM ± (3% +5)
	500V (0 % ~+ 20 %)	0.01MΩ ~500 MΩ ± (3% +5)
	1000V (0 % ~+ 20 %)	1.00GΩ ~5.00 GΩ ± (5% +0.1GΩ)
		5.00GΩ ~10.00 GΩ ± (10% +0.2GΩ)
Short circuit Current	Approx. 2mA	
Multimeter fonctions	DC Voltage Test	0.1 ~ 1000V ± 0.5%
	AC Voltage Test	0.1 ~ 750V ± 1%
	Continuity Test	0.01Ω ~ 200Ω ± 0.5%

FEATURE

	FEATURE
Features	Auto calculate PI and DAR
	Store/Load function
	Compare function
	Auto discharge for capacitive load
	Timer function for insulation test
	Lock function for insulation test
	Low battery indication
	DCV and ACV Test

	Continuity Test	
	Auto power off	
	Digital and Analog display	
General		
General	Power Supply	6x1.5V AA batterie
	Product size	180mm x 140mm x 65mm
	Product weight	Approx. 950g
	Safety Rating	EN61010-1,EN61557-1,ENS61326-1 CAT.III 1000V CAT . IV 600V

